

Features

- Single action models
- Breakglass type double action models
- Institutional option:
 - Key operated only
- Pull lever protrudes when alarmed
- Tamper resistant reset key lock:
 - keyed same as fire alarm cabinet
- Pre-signal and annunciator contact options
- Surface or semi-flush mounting
- Flush mounting option
- Two stage alarm
- English, French, or Bilingual

Operation

Single Action Stations require a firm downward pull to activate the alarm switch. Completing the action breaks an internal plastic break-rod (visible below the pull lever). The pull lever latches into the alarm position and remains extended out of the cover to provide a visible indication of which station was alarmed.


Double Action Stations (Breakglass) require the operator to strike the front mounted hammer to break the glass and expose the recessed pull lever. The pull lever then operates as a single action station.

Single action stations can be fitted with an institutional cover kit. **Institutional Stations** are designed to activate by key operation only. This allows access for manual alarms to be limited to authorized personnel. Operation requires key insertion and opening of the station cover.


Pre-signal option activates when the lever is pulled. General alarm initiation requires a key to activate a keyswitch located behind the pull lever.

Station Reset requires use of a key to reset the pull station lever and deactivate the alarm switch. If the break-rod is used, it must be replaced.

Testing requires physical activation of the pull lever (except for institutional stations).

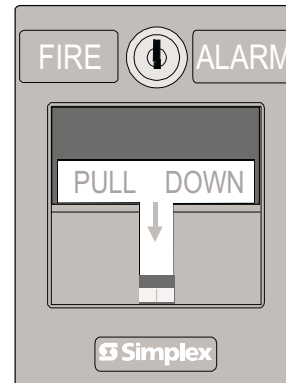

Single Action Station

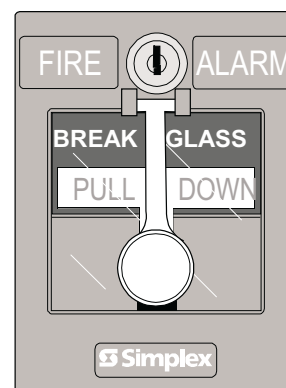

Double Action Station (Breakglass)



Single Action Station with Institutional Cover

Applications

According to the National Building Code, a manual pull station shall be installed in every floor area near every required exit. CAN/ULC-S524-M91 states that stations “shall be mounted not less than 1200 mm nor more than 1400 mm above the floor level...”. In addition, the National Fire Protection Association (NFPA), Bulletin number 72 (reference section 5-9), gives specific minimum requirements on this subject. When manual station coverage appears limited in any way, additional units should be installed. Stations should be mounted with the bottom of the station not less than 1.07 m (3.5 ft.) or more than 1.52 m (5 ft.) from the floor. Usually stations are mounted at the 1.37 m (4.5 ft.) level. (In order to make buildings and facilities accessible to, and usable by the physically handicapped, some specifications may require that the station be installed not more than 1.07 m (3.5 ft.) from the floor.)

Stations should be located in the normal path of exit, and distributed in the protected area so that they are unobstructed and readily accessible.

Stations should be provided on each floor to obtain a travel distance not more than 61 m (200 ft.) to the nearest station from any point in the building. One station should be provided for each floor where the maximum floor area is 930 m² (10,000 ft.²) or more.

Construction. Covers and pull levers are constructed of chip resistant and dirt resistant, high impact Lexan polycarbonate. Covers are red with white lettering and pull levers are white with red lettering.

The 2099-9819 (Black) and 2099-9820 (Beige) are optional adapter kits designed to flush mount any one of the 2099 series stations.

Non-addressable Manual Station Specification Chart

Single Action Models	Actuator	Actuator Annum.	GA Key	Single Gang Box Depth mm (inches)
2099-9754C	N/O			38 (1.5)
2099-9288C	N/O		N/O	51 (2.0)
2099-9752C	N/O:C/L		N/O	51 (2.0)
2099-9101C	N/O	N/O		51 (2.0)
2099-9107C	N/O	N/O	N/O	76 (3.0)
2099-9110C	N/O:C/L	N/O	N/O	51 (2.0)
2099-9102C	N/O	N/C		51 (2.0)
2099-9109C	N/O	N/C	N/O	76 (3.0)
2099-9111C	N/O:C/L	N/C	N/O	51 (2.0)

Double Action Models - Breakglass	Actuator	Actuator Annum.	GA Key	Single Gang Box Depth mm (inches)
2099-9103C	N/O			38 (1.5)
2099-9336C	N/O		N/O	51 (2.0)
2099-9772C	N/O:C/L		N/O	51 (2.0)
2099-9104C	N/O	N/O		51 (2.0)
2099-9108C	N/O	N/O	N/O	76 (3.0)
2099-9118C	N/O:C/L	N/O	N/O	51 (2.0)
2099-9105C	N/O	N/C		51 (2.0)
2099-9117C	N/O	N/C	N/O	76 (3.0)
2099-9119C	N/O:C/L	N/C	N/O	51 (2.0)

N/O = Normally Open Contact — N/C = Normally Closed Contact — C/L = Current Limited when activated
 MODELS SHOWN ARE ENGLISH LANGUAGE. ADD 'F' FOR FRENCH – 'B' FOR BILINGUAL
 e.g. 2099-9754C, 2099-9754CF, 2099-9754CB


Accessories

Model	Description
2099-9803	Replacement breakglass (standard, English)
2099-9804	Replacement break-rod
2099-9819	Flush adapter kit, black (refer to page 4)
2099-9820	Flush adapter kit, beige (refer to page 4)
2099-9822	Replacement retaining clip for breakglass
2099-9828	Institutional cover kit
2975-9178	Red, surface mount box, sheet metal, 5 3/16" H x 4" W x 2 3/16" D (127 mm x 102 mm x 56 mm)
2975-9022	Red, cast aluminum surface mount box, 5" H x 3 7/8" W x 2 3/16" D (127 mm x 98 mm x 56 mm)
12975-0001	Red, surface mount box, sheet metal, 5 3/16" H x 4" W x 2 11/16" D (127 mm x 102 mm x 68 mm)


Mounting Information

Refer to installation instructions (PER-21-502CAN) for additional information.


SURFACE MOUNTING

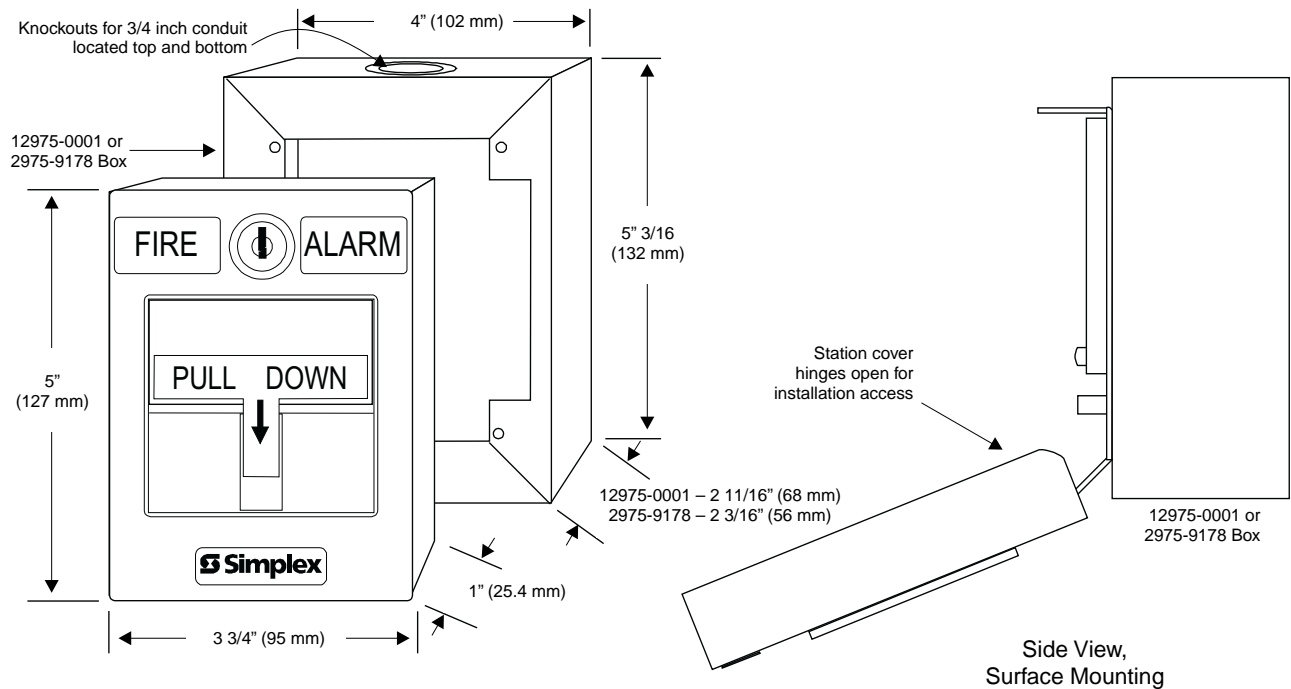

SEMI-FLUSH MOUNTING, 4" BOX (refer to selection chart for requirements)

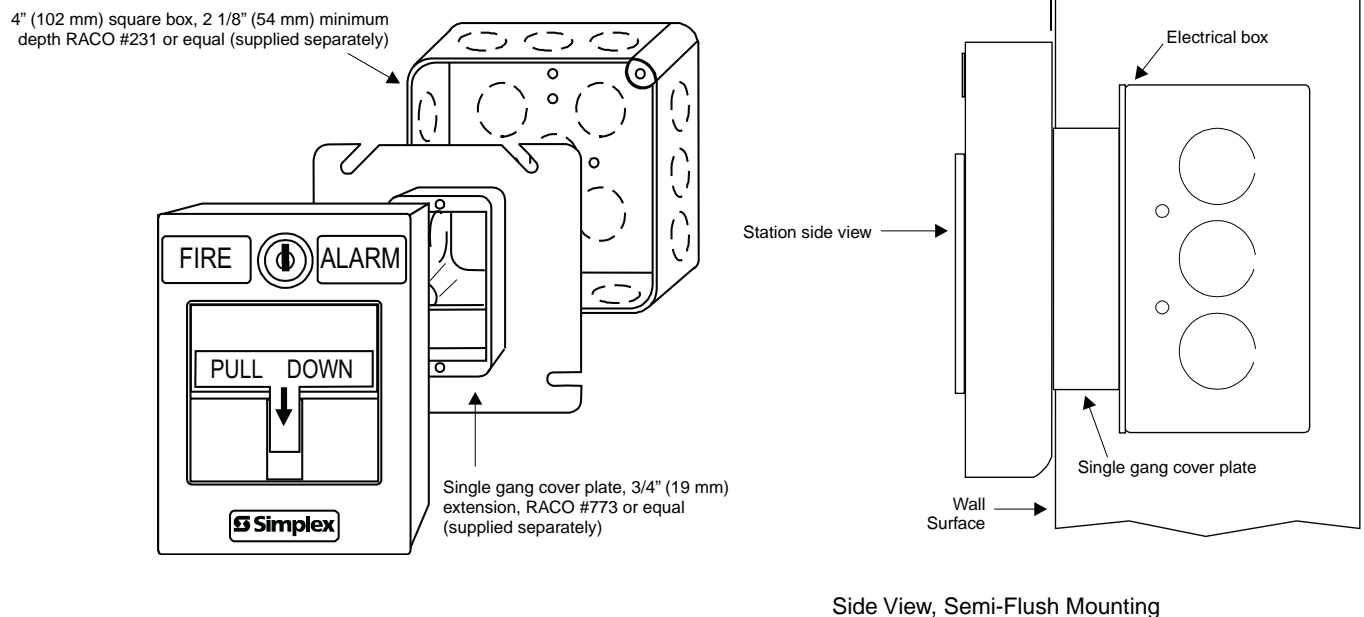

FLUSH MOUNTING REFERENCE INFORMATION

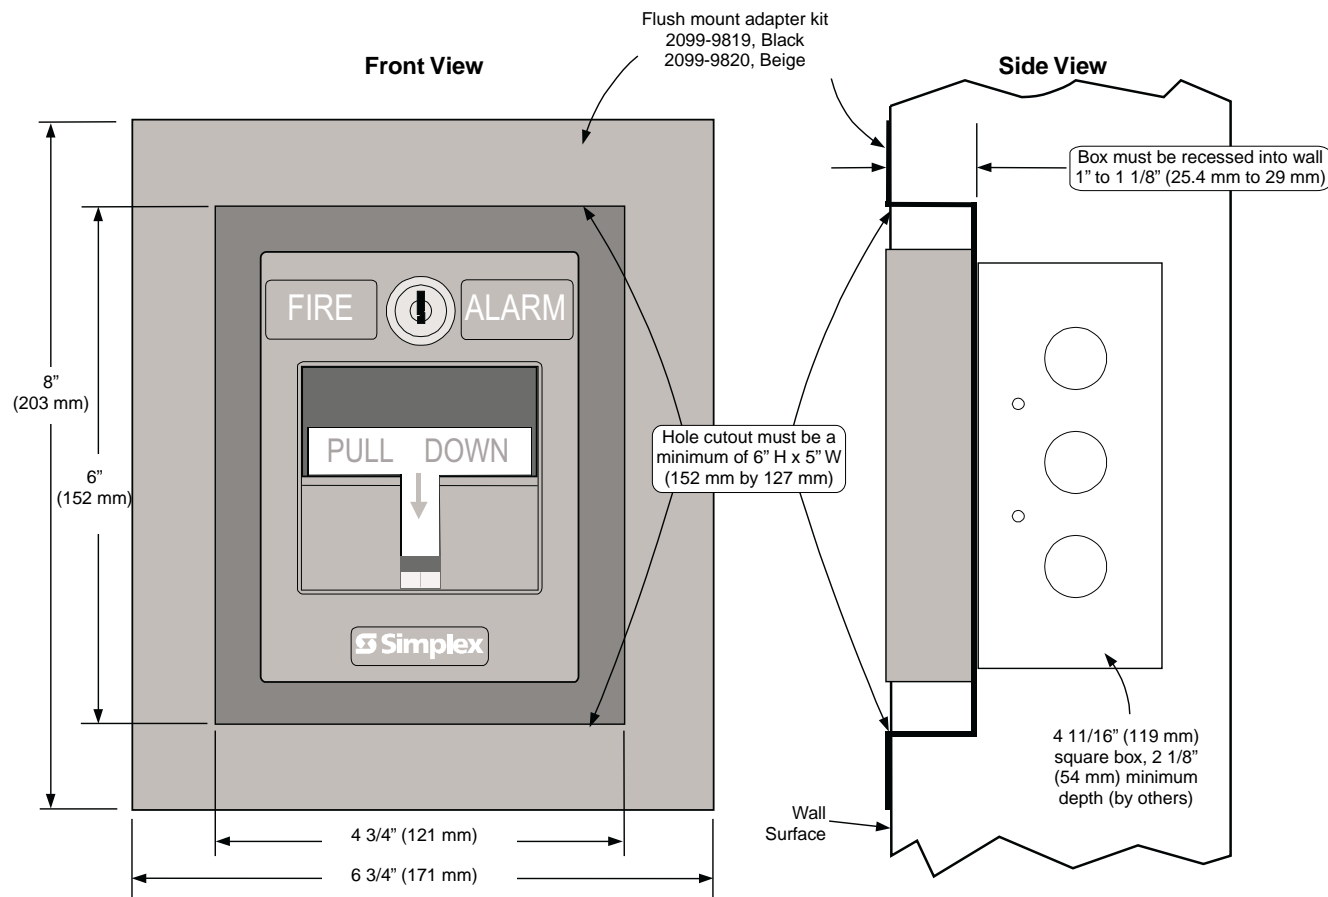

Simplex, the Simplex logo, MAPNET, and IDNet are either trademarks or registered trademarks of Simplex Time Recorder Co. in the U.S. and/or other countries. NFPA 72 and National Fire Alarm Code are registered trademarks of the National Fire Protection Association (NFPA). Lexan is a registered trademark of General Electric Co.



S12099-0007-1 9/00
2400 Skymark Avenue, Mississauga, Ontario L4W 5K5
Offices and Representatives Throughout the World.
Visit us on the world wide web at www.simplexnet.com

All specifications and other information shown were current as of printing and are subject to change without notice. Printed in Canada.