

UL, ULC Listed
FM Approved


Fire Alarm Controls
4100/4120
Panel Mounted Printer

FEATURES:

- Provides Hard Copy Record of Fire Alarm System Events
- Prints Bold for Alarm Activity
- Standard 4100/4120 Wall Mount or Vertical Console Mount
- Built-In Paper Take-Up
- Operates on System Battery During Power Failure
- LED Indicates: Power On, Low Paper, and Out of Paper
- Switch Control for: On, Off, Line-Feed, and Self-Test

SPECIFICATIONS:

Model..... 4100/4120-0451
Voltage24 VDC, System Supplied
Current:
Standby70 mA
Printing800 mA
Communications Internal RS-232
Mounting:
Width Requirement ..6" (152 mm), 3 Module Widths
Depth.....4" (102 mm)
Paper (1 roll included):
Type..... Thermal
Width2.35 in (60 mm)
Length160 ft (49 m)
Replacement Paper (1 Roll)..... 4190-9803
Print Characteristics:
Characters.....11 x 28 dot matrix
Image Color..... Black
Density.....6 Lines per Inch
Paper Speed 1.3 in/sec
Print Speed.....312 cps
Running Noise..... 55 dB Maximum
Print Direction..... Bi-Directional
Print Width.....40 Column
Exposed Print.....20 Lines
Operating Temperature..... 32° F to 120° F
(0°C to 49° C)
Operating Humidity..... 10 to 85%, Non-Condensing

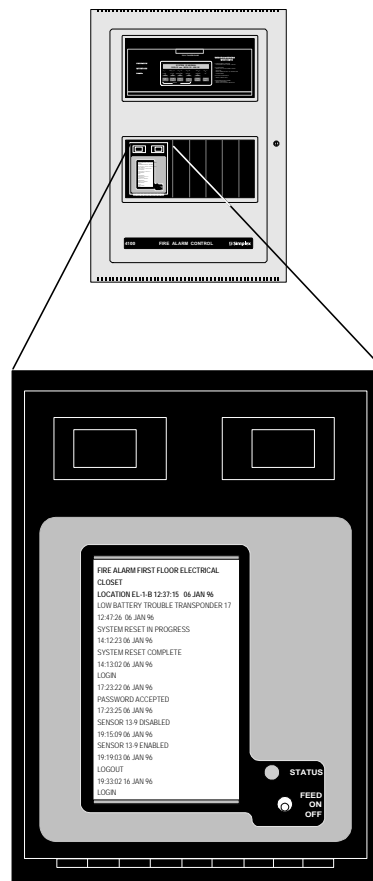

PANEL MOUNT PRINTER

DESCRIPTION:

The 4100/4120-0451 panel mount printer provides a convenient and compact location for creating hard copy records of system activity. Alarm, trouble, and supervisory conditions, as well as other site-specific system messages can be printed, depending on the individual system requirements. Printer operation is fast and quiet, allowing system events to be recorded with minimal operator distraction.

Recorded events stored on the internal paper take-up are readily accessible by unwinding the paper from its take-up reel and then rewound using the line feed switch. Paper removal and replacement is easily accessed by opening the two latches at the top of the printer cover and pivoting the assembly forward on its bottom mounted hinges.

PRINTER DETAIL:

