


ULC Listed

## Fire Fighter's Telephones 2084 Series (Type 4590) Remote Emergency Telephone Equipment

### FEATURES

- **Fire fighter's telephones provide direct communications with master phone:**
  - Phone circuits are supervised
  - Tones are provided to indicate master is being called (exact performance may vary depending on master phone equipment)
- **Phones are available for:**
  - Surface or flush cabinet mounting (cabinet must be ordered separately)
  - Or separate for plugging into dedicated remote phone jack stations
- **Available options:**
  - Armoured cable models to minimize vandalism (voice and ear caps are sealed with adhesive)

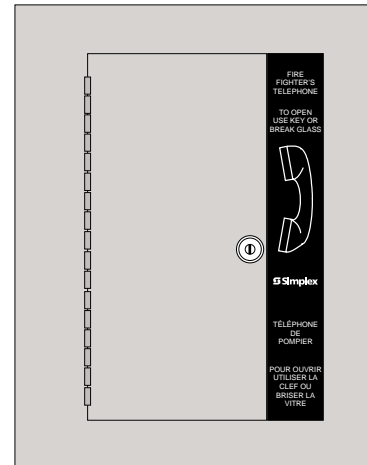

**2084-9103-C  
Breakglass Door Assembly**

### MODEL DESCRIPTIONS


**Remote Phone in Locked Cabinet.** The red cabinet is silk-screened with Fire Fighter's Telephone on the door's breakglass. Phone is available with either an armoured cable, or a retractable cable.

**2084-9001 Remote Phone Jack Stations.** Jacks are mounted on a single gang plate for use with pluggable phones. The front is marked "Fire Emergency Phone". An optional call LED indicator is available. No additional circuits are required to operate the call-in LED when the remote phone is connected to a Simplex fire fighter's phone system.


**2084-9014 Red Pluggable Phone.** The 2084-9014 emergency telephone is ruggedly constructed of Cylolac Type T, a thermal ABS material. A coiled line cord and jack is attached. Cord length is 5 ft. (1524 mm).



**2084-9001  
Remote Phone Jack Station**

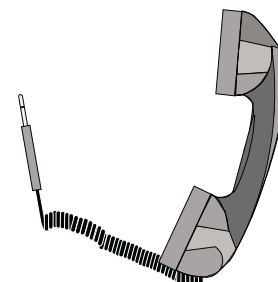

**2084-9014  
Pluggable Phone**

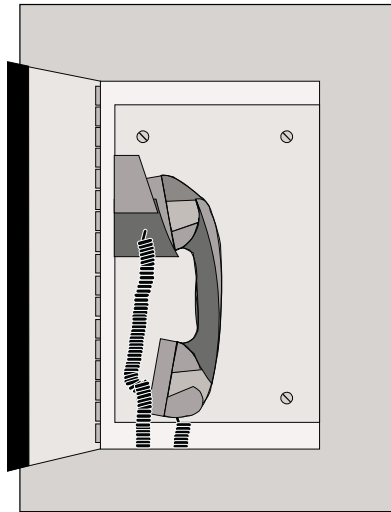

**Interior View of Typical Remote Phone Cabinet**

## Fire Fighter's Emergency Phones

PID	Description	Dimensions
<b>Door with Breakglass</b> (Select one from this category)		
2084-9103-C	Red Surface Door	13 1/2" x 10 1/4" (343 mm x 260 mm)
2084-9104-C	Red Flush Door	15" x 12" (381 mm x 305 mm)
2084-9105-C	Stainless Steel Flush Door	15" x 12" (381 mm x 305 mm)
<b>Phone Assembly</b> (Select one from this category)		
2084-9106-C	Red Phone Assembly - Armoured cable	
2084-9107-C	Red Phone Assembly - Retractable cable	
<b>Accessories</b>		
2084-9001	Remote Phone Jack, single gang mount, requires minimum of 2" box depth.	
2084-9014	Pluggable Red Phone with 5 foot cable	
2084-9108-C	Replacement Glass Insert for use with 2084-9103-C through -9105C	
2975-9053*	Red Back Box (available for pre-installation)	13" H x 9 9/16" W x 3 1/2" D (330 mm x 243 mm x 89 mm)
2975-9313C	Red Back Box w/o knockouts	13" H x 9 9/16" W x 3 1/2" D (330 mm x 243 mm x 89 mm)

\* Back box must be ordered separately.



S12084-0001-5 9/00  
 2400 Skymark Avenue, Mississauga, Ontario L4W 5K5  
 Offices and Representatives Throughout the World.  
 Visit us on the world wide web at [www.simplexnet.com](http://www.simplexnet.com)

All specifications and other information shown were current as of publication, and are subject to change without notice. Printed in Canada.